



**MAC 25-4**  
25 Tonne Lifting Capacity  
Pick & Carry Crane  
Datasheet  
Metric

# MAC 25-4



**Features: MAC 25-4**

- ▶ 25 tonne at 1.41 m radius
- ▶ 1.8 tonne at 15.71 m radius
- ▶ 18 m maximum hook height
- ▶ Hook block (6 parts) capacity 25 tonne
- ▶ Single line 4.2 tonne

**WORKS FOR YOU.™**

# CONTENTS

MAC 25-4

Page:

## Key

|       |   |
|-------|---|
| ..... | 3 |
|-------|---|

## Dimensions

|                         |      |
|-------------------------|------|
| Crane dimensions .....  | 4, 5 |
| Range diagram .....     | 6    |
| Area of operation ..... | 7    |

## Load charts

|                                |    |
|--------------------------------|----|
| Fallblock, Front counterweight |    |
| Third boom retracted .....     | 8  |
| Third boom extending .....     | 9  |
| Fallblock, Rear counterweight  |    |
| Third boom retracted .....     | 10 |
| Third boom extending .....     | 11 |

## Technical description

|  |    |
|--|----|
| Boom and Jib .....                     | 12 |
| Winch .....                            | 12 |
| Engine and transmission .....          | 12 |
| Hydraulic system .....                 | 13 |
| Chassis .....                          | 13 |
| Tyres .....                            | 13 |
| Vehicle performance .....              | 14 |
| Cab, controls, and operator aids ..... | 14 |

# KEY


# MAC 25-4

|   |                      |   |   |
|---|----------------------|---|---|
|    | Boom length          |    | Speed   |
|    | Hook height          |    | Slewing / Allowable slewing range             |
|    | Boom with jib        |    | Crane / Crane in standard configuration       |
|    | Telescoping mode     |    | Gradeability                                  |
|    | Boom elevation angle |    | Gross vehicle weight                          |
|    | Working radius       |    | Counterweight on front                        |
|   | Hook and block       |  | Counterweight on rear                         |
|  | On rubber            |  | Controls                                      |
|  | Main winch           |  | Cab   |
|  | Winch speed          |  | Air conditioning / Cab heating                |
|  | Engine               |  | Operator aids / Load limiter / Load indicator |
|  | Transmission         |  | Rope – Standard / Optional                    |
|  | Hydraulics           |  | Rope diameter                                 |
|  | Steering             |  | Rope length                                   |
|  | Tyres                |  | Maximum line pull                             |

# DIMENSIONS

**MAC 25-4**


## Crane Dimensions

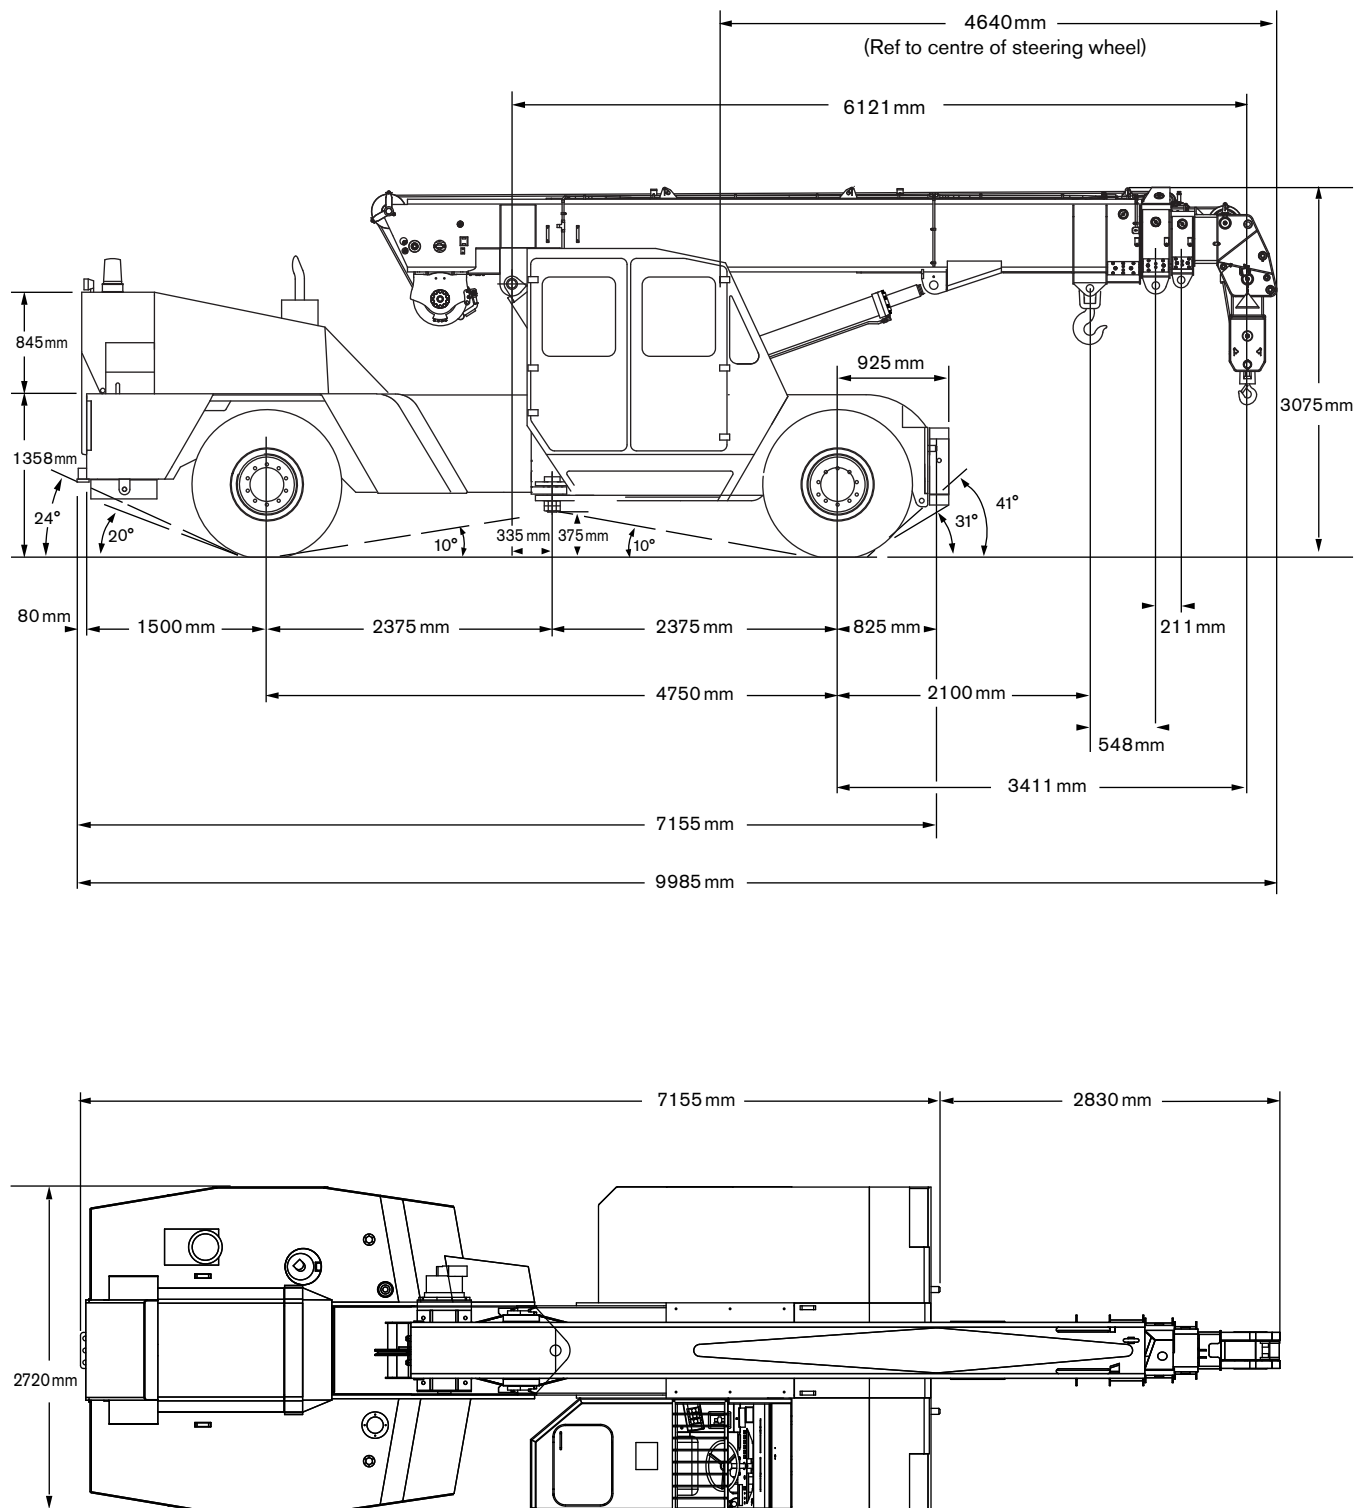

# DIMENSIONS


**MAC 25-4**

## Crane Dimensions

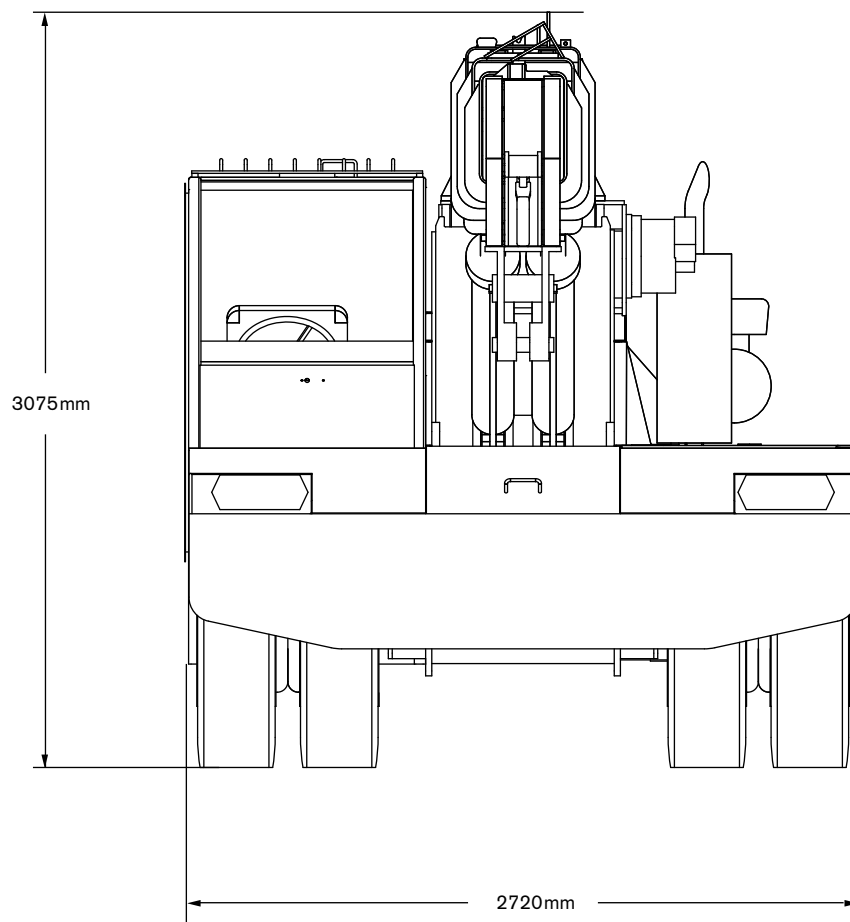


# RADIUS LOAD CHART

MAC 25-4




Pick & Carry 0.4 m/s (1.44 km/h); On rubber 66.6%

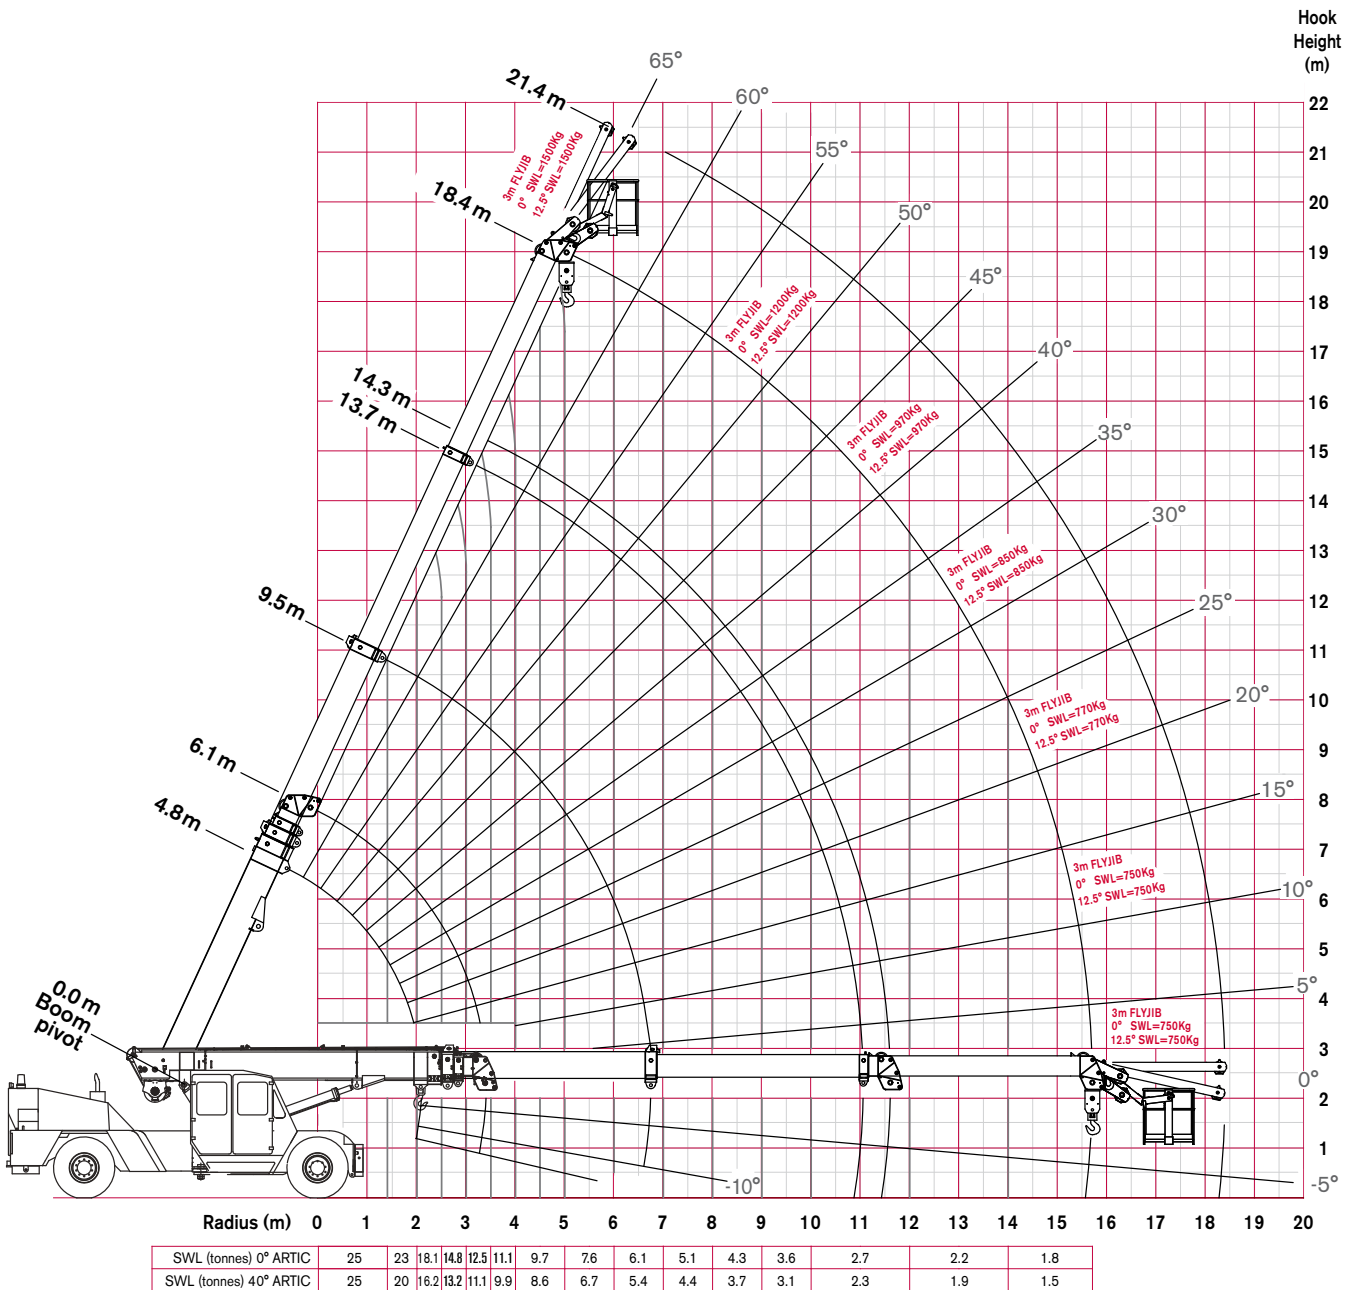

# AREA OF OPERATION


**MAC 25-4**

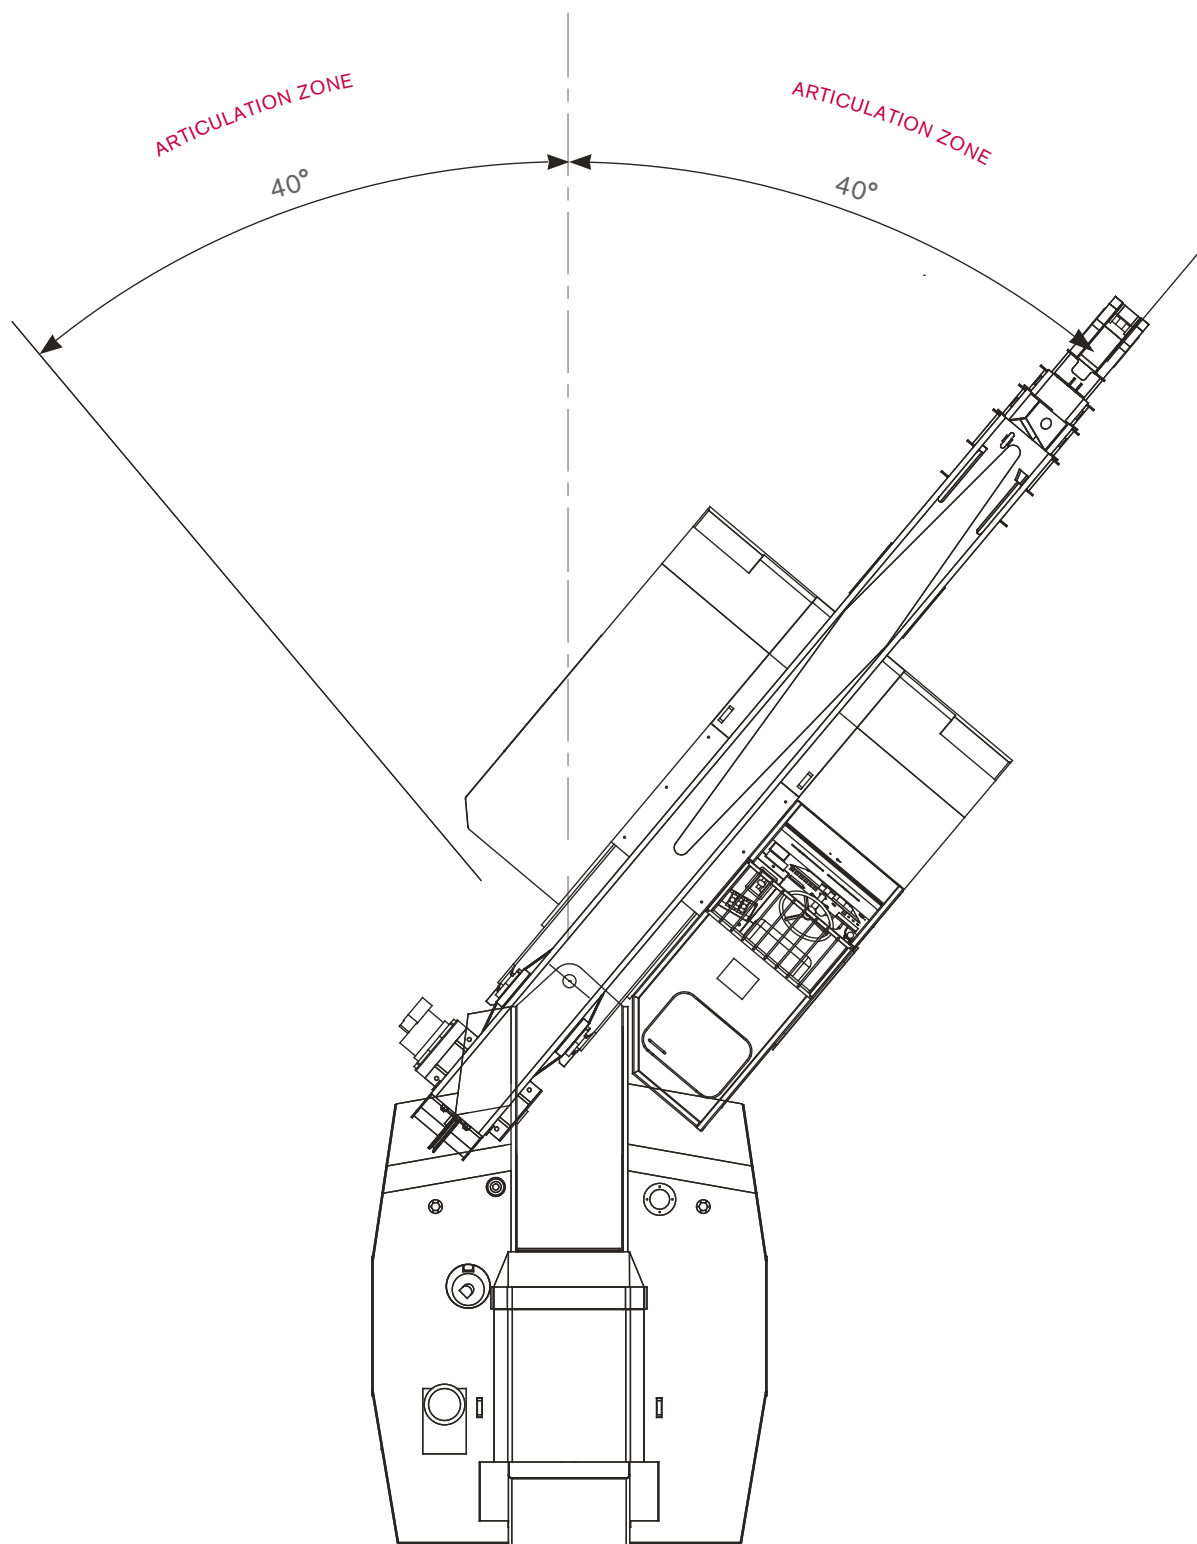

# LOAD CHART

# MAC 25-4

## Fallblock, Front Counterweight, 3rd Boom Retracted



Pick &amp; Carry 0.4 m/s (1.44 km/h); On rubber 66.6%



6.1–14.0 m

AS 1418.5

| m   | Boom Length (m) |       |       |       |       |       |       |       |       |       |       |       |      | m   |
|-----|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|-----|
|     | 6.1             | 6.5   | 7.0   | 7.5   | 8.0   | 8.5   | 9.0   | 9.5   | 10.0  | 11.0  | 12.0  | 13.0  | 14.0 |     |
| kg  | kg              | kg    | kg    | kg    | kg    | kg    | kg    | kg    | kg    | kg    | kg    | kg    | kg   |     |
| 1.4 | 24000           | 23950 | 23950 | 23950 | 23900 | 23900 | 23550 |       |       |       |       |       |      | 1.4 |
|     | 23450           | 23450 | 23400 | 23400 | 23350 | 23350 | 23350 |       |       |       |       |       |      |     |
|     | 49°             | 52°   | 56°   | 58°   | 61°   | 63°   | 65°   |       |       |       |       |       |      |     |
| 2.0 | 20100           | 20050 | 20050 | 20000 | 19950 | 19950 | 19900 | 19850 | 19850 |       |       |       |      | 2.0 |
|     | 18050           | 18000 | 17950 | 17900 | 17900 | 17850 | 17850 | 17800 | 17800 |       |       |       |      |     |
|     | 41°             | 45°   | 49°   | 52°   | 55°   | 58°   | 60°   | 62°   | 64°   |       |       |       |      |     |
| 2.5 | 15800           | 15750 | 15750 | 15700 | 15700 | 15650 | 15650 | 15600 | 15600 | 15550 |       |       |      | 2.5 |
|     | 15100           | 15100 | 15050 | 15050 | 15000 | 15000 | 14950 | 14950 | 14950 | 14900 |       |       |      |     |
|     | 14150           | 14100 | 14100 | 14050 | 14050 | 14000 | 13950 | 13950 | 13950 | 13900 |       |       |      |     |
| 3.0 | 12900           | 12900 | 12850 | 12850 | 12850 | 12800 | 12800 | 12750 | 12750 | 12700 | 12700 |       |      | 3.0 |
|     | 12350           | 12350 | 12300 | 12300 | 12300 | 12250 | 12250 | 12200 | 12200 | 12150 | 12150 |       |      |     |
|     | 11500           | 11500 | 11500 | 11450 | 11450 | 11450 | 11400 | 11400 | 11350 | 11350 | 11300 |       |      |     |
| 3.5 | 10850           | 10800 | 10800 | 10800 | 10800 | 10750 | 10750 | 10750 | 10700 | 10700 | 10650 | 10650 |      | 3.5 |
|     | 10350           | 10350 | 10350 | 10350 | 10300 | 10300 | 10300 | 10250 | 10250 | 10200 | 10200 | 10200 |      |     |
|     | 9650            | 9650  | 9650  | 9600  | 9600  | 9600  | 9550  | 9550  | 9550  | 9500  | 9500  | 9100  |      |     |
| 4.0 | (3.5)           | 19°   | 28°   | 35°   | 40°   | 44°   | 47°   | 50°   | 53°   | 57°   | 61°   | 63°   |      | 4.0 |
|     | 9600            | 9250  | 9250  | 9250  | 9250  | 9250  | 9200  | 9200  | 9150  | 9150  | 9150  | 9100  |      |     |
|     | 9200            | 8850  | 8850  | 8850  | 8850  | 8850  | 8800  | 8800  | 8750  | 8750  | 8700  | 8700  |      |     |
| 5.0 | 8550            | 8250  | 8250  | 8200  | 8200  | 8200  | 8200  | 8150  | 8150  | 8100  | 8050  | 8150  |      | 5.0 |
|     | (3.9)           | 18°   | 27°   | 34°   | 39°   | 43°   | 46°   | 49°   | 54°   | 58°   | 61°   | 63°   |      |     |
|     | 8300            | 7300  | 7100  | 7100  | 7100  | 7100  | 7050  | 7050  | 7050  | 7000  | 7000  | 7000  |      |     |
| 6.0 |                 | 7950  | 6950  | 6750  | 6750  | 6750  | 6750  | 6750  | 6750  | 6700  | 6700  | 6700  |      | 6.0 |
|     |                 | 7350  | 6450  | 6250  | 6250  | 6250  | 6250  | 6250  | 6250  | 6200  | 6200  | 6200  |      |     |
|     |                 | (4.4) | (4.9) | 17°   | 26°   | 32°   | 37°   | 40°   | 46°   | 51°   | 55°   | 58°   |      |     |
| 7.0 |                 |       |       |       | 6450  | 5750  | 5650  | 5650  | 5600  | 5600  | 5600  | 5600  |      | 7.0 |
|     |                 |       |       |       | 6150  | 5500  | 5350  | 5350  | 5350  | 5350  | 5350  | 5300  |      |     |
|     |                 |       |       |       | 5700  | 5050  | 4950  | 4950  | 4950  | 4950  | 4900  | 4900  |      |     |
| 8.0 |                 |       |       |       | (5.4) | (5.9) | 16°   | 24°   | 30°   | 38°   | 44°   | 49°   |      | 8.0 |
|     |                 |       |       |       |       |       |       |       |       |       |       |       |      |     |
|     |                 |       |       |       |       |       |       |       |       |       |       |       |      |     |
| 9.0 |                 |       |       |       |       |       |       |       |       |       |       |       |      | 9.0 |
|     |                 |       |       |       |       |       |       |       |       |       |       |       |      |     |
|     |                 |       |       |       |       |       |       |       |       |       |       |       |      |     |
| 10  |                 |       |       |       |       |       |       |       |       |       |       |       |      | 10  |
|     |                 |       |       |       |       |       |       |       |       |       |       |       |      |     |
|     |                 |       |       |       |       |       |       |       |       |       |       |       |      |     |
| 11  |                 |       |       |       |       |       |       |       |       |       |       |       |      | 11  |
|     |                 |       |       |       |       |       |       |       |       |       |       |       |      |     |
|     |                 |       |       |       |       |       |       |       |       |       |       |       |      |     |
| 12  |                 |       |       |       |       |       |       |       |       |       |       |       |      | 12  |
|     |                 |       |       |       |       |       |       |       |       |       |       |       |      |     |
|     |                 |       |       |       |       |       |       |       |       |       |       |       |      |     |

- RC (kg) at 0° articulation
- RC (kg) at 25° articulation
- RC (kg) at 40° articulation
- Boom angle
- Radius at 0° boom angle
- Loads above red line are structural

### Notes to lifting capacity

Lifting capacities do not exceed 66.6% of tipping load. Weight of hook blocks and slings is part of the load, and is to be deducted from the capacity ratings. Consult Rated Capacity Manual for further details.


Data published herein is intended as a guide only and shall not be construed to warrant applicability for lifting purposes. Crane operation is subject to the computer charts and Rated Capacity Manual both supplied with the crane.



# LOAD CHART

# MAC 25-4

## Fallblock, Front Counterweight, 3rd Boom Extending





Pick & Carry 0.4 m/s (1.44 km/h);  
On rubber 66.6%



15.0–18.42 m

AS 1418.5

|  | Boom Length (m) |        |        |        |  |
|---|-----------------|--------|--------|--------|---|
|   | 15.0            | 16.0   | 17.0   | 18.4   |   |
| m   | kg              | kg     | kg     | kg     | m   |
| 1.4   |                 |        |        |        | 1.4   |
| 2.0   |                 |        |        |        | 2.0   |
| 2.5   |                 |        |        |        | 2.5   |
| 3.0   |                 |        |        |        | 3.0   |
| 3.5   |                 |        |        |        | 3.5   |
| 4.0   |                 |        |        |        | 4.0   |
| 5.0   | 7050            | 7150   | 7250   |        | 5.0   |
|   | 6750            | 6800   | 6900   |        |   |
|   | 5800            | 5500   | 5350   |        |   |
|   | 61°             | 63°    | 65°    |        |   |
| 6.0   | 5650            | 5700   | 5800   | 5900   | 6.0   |
|   | 5350            | 5450   | 5500   | 5600   |   |
|   | 4850            | 4700   | 4550   | 4350   |   |
|   | 56°             | 59°    | 61°    | 64°    |   |
| 7.0   | 4600            | 4700   | 4800   | 4850   | 7.0   |
|   | 4400            | 4450   | 4550   | 4650   |   |
|   | 4050            | 4050   | 3950   | 3800   |   |
|   | 51°             | 54°    | 57°    | 60°    |   |
| 8.0   | 3850            | 3950   | 4000   | 4100   | 8.0   |
|   | 3650            | 3750   | 3800   | 3900   |   |
|   | 3350            | 3450   | 3450   | 3350   |   |
|   | 45°             | 49°    | 52°    | 56°    |   |
| 9.0   | 3250            | 3350   | 3400   | 3500   | 9.0   |
|   | 3100            | 3150   | 3250   | 3300   |   |
|   | 2800            | 2900   | 2950   | 2950   |   |
|   | 39°             | 44°    | 47°    | 52°    |   |
| 10  | 2800            | 2850   | 2950   | 3000   | 10  |
|   | 2600            | 2700   | 2750   | 2850   |   |
|   | 2400            | 2450   | 2500   | 2600   |   |
|   | 33°             | 38°    | 42°    | 47°    |   |
| 11  | 2400            | 2500   | 2550   | 2650   | 11  |
|   | 2250            | 2350   | 2400   | 2500   |   |
|   | 2000            | 2100   | 2150   | 2250   |   |
|   | 24°             | 32°    | 37°    | 43°    |   |
| 12  | 2050            | 2150   | 2200   | 2300   | 12  |
|   | 1900            | 2000   | 2100   | 2150   |   |
|   | 1700            | 1800   | 1850   | 1950   |   |
|   | 12°             | 24°    | 31°    | 38°    |   |
| 13  | 1950            | 1850   | 1950   | 2000   | 13  |
|   | 1800            | 1750   | 1800   | 1900   |   |
|   | 1600            | 1550   | 1600   | 1700   |   |
|   | (12.4)          | 12°    | 23°    | 32°    |   |
| 14  |                 | 1750   | 1700   | 1800   | 14  |
|   |                 | 1450   | 1400   | 1500   |   |
|   |                 | (13.4) | 12°    | 25°    |   |
| 15  |                 |        | 1600   | 1550   | 15  |
|   |                 |        | 1300   | 1300   |   |
|   |                 |        | (14.4) | 17°    |   |
| 15.71   |                 |        |        | 1400   | 15.71   |
|   |                 |        |        | 1150   |   |
|   |                 |        |        | (15.8) |   |

- RC (kg) at 0° articulation
- RC (kg) at 25° articulation
- RC (kg) at 40° articulation
- Boom angle
- Radius at 0° boom angle
- Loads above red line are structural

### Notes to lifting capacity

Lifting capacities do not exceed 66.6% of tipping load.

Weight of hook blocks and slings is part of the load, and is to be deducted from the capacity ratings.


Consult Rated Capacity Manual for further details.

Data published herein is intended as a guide only and shall not be construed to warrant applicability for lifting purposes. Crane operation is subject to the computer charts and Rated Capacity Manual both supplied with the crane.

# LOAD CHART

# MAC 25-4

## Fallblock, Rear Counterweight, Third Boom Retracted





Pick &amp; Carry 0.4 m/s (1.44 km/h); On rubber 66.6%



6.1–14.0 m

AS 1418.5

|  | Boom Length (m) |       |       |       |       |       |       |       |       |       |       |        |        |  |
|---|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|---|
|   | 6.1             | 6.5   | 7.0   | 7.5   | 8.0   | 8.5   | 9.0   | 9.5   | 10.0  | 11.0  | 12.0  | 13.0   | 14.0   |   |
| m   | kg              | kg    | kg    | kg    | kg    | kg    | kg    | kg    | kg    | kg    | kg    | kg     | kg     | m   |
| 1.4   | 25000           | 25000 | 25000 | 2500  | 24500 | 23950 | 23550 |       |       |       |       |        |        | 1.4   |
|   | 24800           | 24800 | 24800 | 24750 | 24550 | 24000 | 23600 |       |       |       |       |        |        |   |
|   | 49°             | 52°   | 56°   | 58°   | 61°   | 63°   | 65°   |       |       |       |       |        |        |   |
| 2.0   | 22950           | 22950 | 22900 | 22900 | 22850 | 22800 | 22800 | 22750 | 22750 |       |       |        |        | 2.0   |
|   | 20550           | 20550 | 20500 | 20450 | 20450 | 20400 | 20350 | 20300 |       |       |       |        |        |   |
|   | 41°             | 45°   | 49°   | 52°   | 55°   | 58°   | 60°   | 62°   | 64°   |       |       |        |        |   |
| 2.5   | 18100           | 18100 | 18050 | 18000 | 18000 | 17950 | 17950 | 17900 | 17900 | 17850 |       |        |        | 2.5   |
|   | 17300           | 17300 | 17250 | 17250 | 17200 | 17200 | 17150 | 17150 | 17150 | 17100 |       |        |        |   |
|   | 16150           | 16150 | 16100 | 16100 | 16050 | 16050 | 16000 | 16000 | 15950 | 15100 |       |        |        |   |
| 3.0   | 33°             | 38°   | 43°   | 47°   | 51°   | 54°   | 56°   | 58°   | 60°   | 64°   |       |        |        | 3.0   |
|   | 14800           | 14800 | 14800 | 14800 | 14750 | 14750 | 14700 | 14700 | 14700 | 14650 | 14550 |        |        |   |
|   | 14200           | 14150 | 14150 | 14150 | 14100 | 14100 | 14050 | 14050 | 14050 | 14000 | 13450 |        |        |   |
| 3.5   | 13200           | 13200 | 13200 | 13150 | 13150 | 13100 | 13100 | 13100 | 13050 | 12650 | 11450 |        |        | 3.5   |
|   | 22°             | 30°   | 36°   | 41°   | 46°   | 49°   | 52°   | 54°   | 57°   | 60°   | 64°   |        |        |   |
|   | 12500           | 12450 | 12450 | 12450 | 12450 | 12400 | 12400 | 12400 | 12350 | 12350 | 12300 | 12300  |        |   |
| 4.0   | 11950           | 11900 | 11900 | 11900 | 11900 | 11850 | 11850 | 11850 | 11800 | 11800 | 11750 | 11600  |        | 4.0   |
|   | 11100           | 11100 | 11100 | 11050 | 11050 | 11050 | 11000 | 11000 | 11000 | 10850 | 9900  | 9100   |        |   |
|   | (3.5)           | 19°   | 28°   | 35°   | 40°   | 44°   | 47°   | 50°   | 53°   | 57°   | 61°   | 63°    |        |   |
| 5.0   |                 | 11100 | 10700 | 10700 | 10700 | 10700 | 10650 | 10650 | 10650 | 10600 | 10600 | 10600  | 10550  | 5.0   |
|   |                 | 10600 | 10200 | 10200 | 10200 | 10200 | 10200 | 10150 | 10150 | 10150 | 10100 | 10100  | 10100  |   |
|   |                 | 9850  | 9500  | 9500  | 9500  | 9500  | 9450  | 9450  | 9450  | 9400  | 8750  | 8050   | 9400   |   |
| 6.0   |                 | (3.9) | 18°   | 27°   | 34°   | 39°   | 43°   | 46°   | 49°   | 54°   | 58°   | 61°    | 63°    | 6.0   |
|   |                 |       | 9650  | 8500  | 8250  | 8250  | 8250  | 8250  | 8200  | 8200  | 8200  | 8150   | 8150   |   |
|   |                 |       | 9200  | 8100  | 7850  | 7850  | 7850  | 7850  | 7850  | 7800  | 7800  | 7800   | 7750   |   |
| 7.0   |                 |       | 8500  | 7500  | 7250  | 7250  | 7250  | 7250  | 7250  | 7250  | 7050  | 6500   | 6100   | 7.0   |
|   |                 |       | (4.4) | (4.9) | 17°   | 26°   | 32°   | 37°   | 40°   | 46°   | 51°   | 55°    | 58°    |   |
|   |                 |       |       |       | 7550  | 6750  | 6600  | 6600  | 6600  | 6600  | 6550  | 6550   | 6550   |   |
| 8.0   |                 |       |       |       | 7200  | 6450  | 6250  | 6250  | 6250  | 6250  | 6250  | 6250   | 6200   | 8.0   |
|   |                 |       |       |       | 6650  | 5950  | 5800  | 5800  | 5800  | 5800  | 5750  | 5450   | 5100   |   |
|   |                 |       |       |       | (5.4) | (5.9) | 16°   | 24°   | 30°   | 38°   | 44°   | 49°    | 53°    |   |
| 9.0   |                 |       |       |       |       |       | 6100  | 5550  | 5400  | 5400  | 5400  | 5400   | 5400   | 9.0   |
|   |                 |       |       |       |       |       | 5800  | 5250  | 5150  | 5150  | 5150  | 5100   | 5100   |   |
|   |                 |       |       |       |       |       | 5350  | 4850  | 4750  | 4750  | 4700  | 4700   | 4350   |   |
| 10.0  |                 |       |       |       |       |       | (6.4) | (6.9) | 15°   | 29°   | 37°   | 42°    | 47°    | 10.0  |
|   |                 |       |       |       |       |       |       |       | 5050  | 4550  | 4550  | 4550   | 4550   |   |
|   |                 |       |       |       |       |       |       |       | 4800  | 4300  | 4300  | 4300   | 4300   |   |
| 11.0  |                 |       |       |       |       |       |       |       | 4400  | 3950  | 3950  | 3950   | 3850   | 11.0  |
|   |                 |       |       |       |       |       |       |       | (7.4) | 14°   | 27°   | 35°    | 41°    |   |
|   |                 |       |       |       |       |       |       |       |       | 4250  | 3850  | 3850   | 3850   |   |
| 12.0  |                 |       |       |       |       |       |       |       |       | 4000  | 3650  | 3650   | 3650   | 12.0  |
|   |                 |       |       |       |       |       |       |       |       | 3650  | 3300  | 3300   | 3300   |   |
|   |                 |       |       |       |       |       |       |       |       | (8.4) | 14°   | 26°    | 34°    |   |
| 13.0  |                 |       |       |       |       |       |       |       |       |       | 3600  | 3300   | 3300   | 13.0  |
|   |                 |       |       |       |       |       |       |       |       |       | 3400  | 3100   | 3100   |   |
|   |                 |       |       |       |       |       |       |       |       |       | 3100  | 2800   | 2800   |   |
| 14.0  |                 |       |       |       |       |       |       |       |       |       | (9.4) | 13°    | 25°    | 14.0  |
|   |                 |       |       |       |       |       |       |       |       |       |       | 3100   | 2850   |   |
|   |                 |       |       |       |       |       |       |       |       |       |       | 2950   | 2700   |   |
| 15.0  |                 |       |       |       |       |       |       |       |       |       |       | 2650   | 2400   | 15.0  |
|   |                 |       |       |       |       |       |       |       |       |       |       | (10.4) | 13°    |   |
|   |                 |       |       |       |       |       |       |       |       |       |       |        | 2700   |   |
| 16.0  |                 |       |       |       |       |       |       |       |       |       |       |        | 2550   | 16.0  |
|   |                 |       |       |       |       |       |       |       |       |       |       |        | 2250   |   |
|   |                 |       |       |       |       |       |       |       |       |       |       |        | (11.4) |   |

- RC (kg) at 0° articulation
- RC (kg) at 25° articulation
- RC (kg) at 40° articulation
- Boom angle
- Radius at 0° boom angle
- Loads above red line are structural

### Notes to lifting capacity

Lifting capacities do not exceed 66.6% of tipping load. Weight of hook blocks and slings is part of the load, and is to be deducted from the capacity ratings. Consult Rated Capacity Manual for further details.

Data published herein is intended as a guide only and shall not be construed to warrant applicability for lifting purposes. Crane operation is subject to the computer charts and Rated Capacity Manual both supplied with the crane.




# TEREX®

# LOAD CHART

# MAC 25-4

## Fallblock, Rear Counterweight, Third Boom Extending





Pick & Carry 0.4 m/s (1.44 km/h);  
On rubber 66.6%



15.0–18.42 m

AS 1418.5

|  | Boom Length (m) |        |        |        |  |
|---|-----------------|--------|--------|--------|---|
|   | 15.0            | 16.0   | 17.0   | 18.4   |   |
| m   | kg              | kg     | kg     | kg     | m   |
| 1.4   |                 |        |        |        | 1.4   |
| 2.0   |                 |        |        |        | 2.0   |
| 2.5   |                 |        |        |        | 2.5   |
| 3.0   |                 |        |        |        | 3.0   |
| 3.5   |                 |        |        |        | 3.5   |
| 4.0   |                 |        |        |        | 4.0   |
| 5.0   | 8200            | 8300   | 8400   |        | 5.0   |
|   | 7850            | 7900   | 7950   |        |   |
|   | 5800            | 5600   | 5400   |        |   |
|   | 61°             | 63°    | 65°    |        |   |
| 6.0   | 6600            | 6700   | 6750   | 6850   | 6.0   |
|   | 6300            | 6350   | 6450   | 6400   |   |
|   | 4850            | 4700   | 4550   | 4400   |   |
|   | 56°             | 59°    | 61°    | 64°    |   |
| 7.0   | 5450            | 5550   | 5600   | 5700   | 7.0   |
|   | 5150            | 5250   | 5350   | 5400   |   |
|   | 4200            | 4050   | 3950   | 3800   |   |
|   | 51°             | 54°    | 57°    | 60°    |   |
| 8.0   | 4600            | 4650   | 4750   | 4800   | 8.0   |
|   | 4350            | 4400   | 4500   | 4600   |   |
|   | 3650            | 3550   | 3450   | 3350   |   |
|   | 45°             | 49°    | 52°    | 56°    |   |
| 9.0   | 3900            | 4000   | 4050   | 4150   | 9.0   |
|   | 3700            | 3750   | 3850   | 3950   |   |
|   | 3250            | 3150   | 3050   | 2950   |   |
|   | 39°             | 44°    | 47°    | 52°    |   |
| 10  | 3350            | 3450   | 3500   | 3600   | 10  |
|   | 3150            | 3250   | 3300   | 3400   |   |
|   | 2900            | 2850   | 2750   | 2650   |   |
|   | 33°             | 38°    | 42°    | 47°    |   |
| 11  | 2900            | 3000   | 3050   | 3150   | 11  |
|   | 2750            | 2850   | 2900   | 3000   |   |
|   | 2500            | 2550   | 2500   | 2400   |   |
|   | 24°             | 32°    | 37°    | 43°    |   |
| 12  | 2550            | 2650   | 2700   | 2800   | 12  |
|   | 2400            | 2450   | 2550   | 2600   |   |
|   | 2150            | 2200   | 2300   | 2200   |   |
|   | 12°             | 24°    | 31°    | 38°    |   |
| 13  | 2400            | 2300   | 2400   | 2450   | 13  |
|   | 2250            | 2150   | 2250   | 2300   |   |
|   | 2000            | 1950   | 2000   | 2050   |   |
|   | (12.4)          | 12°    | 23°    | 32°    |   |
| 14  |                 | 2200   | 2100   | 2200   | 14  |
|   |                 | 1850   | 1750   | 1850   |   |
|   |                 | (13.4) | 12°    | 25°    |   |
| 15  |                 |        | 2000   | 1950   | 15  |
|   |                 |        | 1650   | 1650   |   |
|   |                 |        | (14.4) | 17°    |   |
| 15.71   |                 |        |        | 1800   | 15.71   |
|   |                 |        |        | 1450   |   |
|   |                 |        |        | (15.8) |   |

- RC (kg) at 0° articulation
- RC (kg) at 25° articulation
- RC (kg) at 40° articulation
- Boom angle
- Radius at 0° boom angle
- Loads above red line are structural

### Notes to lifting capacity

Lifting capacities do not exceed 66.6% of tipping load.

Weight of hook blocks and slings is part of the load, and is to be deducted from the capacity ratings.

Consult Rated Capacity Manual for further details.

Data published herein is intended as a guide only and shall not be construed to warrant applicability for lifting purposes. Crane operation is subject to the computer charts and Rated Capacity Manual both supplied with the crane.





# TECHNICAL DESCRIPTION

# MAC 25-4



## Boom and Jib

|   |  |            |
|---|--|------------|
| <br><br><br><br> | <b>Four section boom:</b><br>Main boom and three powered sections      |            |
|   | Maximum hook height  | 18 m       |
|   | Boom elevation angle range (min. / max.)                               | -10° / 65° |
|   | Maximum hook height with jib   | 22 m       |
|   | 40° articulation each side of centre providing a total 80° slewing arc | 80°        |
|   | Machinery hook   | 15 tonne   |

## Winch

|  |   |                     |
|--|---|---------------------|
| <br><br><br> | <b>Winch:</b><br>Fully compensated hook height when telescoping boom 1 and 2<br>Anti two-block system |                     |
|  | Maximum line pull   | 4.2 tonne           |
|  | Two speed winch   | 41 m/min / 82 m/min |
|  | Hook block, two, four, or six part, maximum rated capacity  | 25 tonne            |

## Engine and Transmission

|  |  |                                      |
|--|--|--------------------------------------|
| <br> | Mercedes OM 906 EUROMOT 3a turbo charged and intercooled diesel engine with hinged engine cover and mid cover for easy serviceability<br>Engine torque<br>Fuel capacity<br>Fuel type | 205 kW<br>1100 Nm<br>440 l<br>diesel |
|  | Allison 3000   | 6-speed automatic                    |
|  | <b>Transfer Case:</b><br>Styer VG 750 2:1 ratio<br>High/low range via airshift<br>2WD/4WD via airshift, disconnect to rear axle  |                                      |
|  |  |                                      |

# TECHNICAL DESCRIPTION

# MAC 25-4

## Hydraulic System



### Hydraulic Pump:

Load sensing axial piston  
Maximum pump flow rate  
Maximum working pressure

150 litre/min  
250 bar


Hydraulic tank with top mounted return and in-tank suction filters

380 l

## Chassis

### Drive axles:


Kessler D71 PL477 heavy duty high speed planetary axle  
Front axle fitted with driver selectable diff lock and reinforced for pick and carry operation



### Removable counterweight on front:

Front axle  
Rear axle


11,900 kg  
12,000 kg



### Removable counterweight on rear:


Front axle  
Rear axle

9,900 kg  
14,000 kg



### Total:

23,900 kg



Full power Orbitrol with twin hydraulic double acting rams  
Priority flow from main pump supply plus electro-hydraulic emergency supply  
Turning Circle: Outside wheels radius

7.9 m

### Brakes:

Air operated high capacity  
Large wedge style twin circuit service and spring applied park brakes on both front and rear axles  
Crane operation hold brake on right side front wheel  
Driver selectable engine exhaust brake is available in all gears - automatically selects converter lockup

### Suspension:

Two semi-elliptic springs on front and rear axle with automatic hydraulic spring lockouts on front axle

## Tyres




14.00 x 20 bias ply duals  
20 in x 10 in heavy duty ISO 10 stud 335 PCD spigot mount rims





# TECHNICAL DESCRIPTION

# MAC 25-4

## Vehicle performance

|   |                            |        |
|---|----------------------------|--------|
|  | Maximum rated travel speed | 75 kph |
|  | Gradeability               | 45%    |

## Cab, Controls, and Operator aids

|   |   |
|---|---|
|    | <b>Two person, insulated lock up cabin:</b><br>ISRI Suspension driver's and passenger seats, including retracting seat belts<br>Colour LCD display<br>MP3 player with integrated GPS with Bluetooth handsfree<br>Reversing camera<br>Centralised greasing<br>Cruise control<br>Engine monitoring<br>Service diagnostics |
|  | Dynamic calculating rated capacity indicator with audio/visual overload pre-warning and motion cut-outs   |
|  | 3 pilot control levers for crane functions  |
|  | Air conditioned and heated  |

## NOTES

## BRISBANE

585 Curtin Avenue East  
Eagle Farm QLD 4009  
AUSTRALIA

Ph: +61 7 3868 9600  
Fax: +61 7 3268 2489

## MELBOURNE

187 Osborne Avenue  
Clayton South VIC 3169  
AUSTRALIA

Ph: +61 3 9551 8644  
Fax: +61 3 9551 8143

## SYDNEY

114 Hassall Street  
Wetherill Park NSW 2164  
AUSTRALIA

Ph: +61 2 8786 4444  
Fax: +61 2 8786 4455

## PERTH

39 Catalano Road  
Canning Vale WA 6155  
AUSTRALIA

Ph: +61 8 9232 0000  
Fax: +61 8 9232 0051

Effective Date: July 2014. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex® is a registered trademark of Terex Corporation in the USA and many other countries. Copyright 2014 Terex Corporation.

Terex Cranes, Global Marketing, Dinglerstraße 24, 66482 Zweibrücken, Germany  
Tel. +49 (0) 6332 830, Email: [info.cranes@terex.com](mailto:info.cranes@terex.com), [www.terexcranes.com](http://www.terexcranes.com)



[www.terexcranes.com](http://www.terexcranes.com)

Brochure Reference: TC-DS-M-E-MAC25-4-07/14



**WORKS FOR YOU.™**